


LEVER HOIST



LEVER HOIST LH-A TYPE


Features:

- Light weight robust construction.
- Automatic double pawl braking system.
- Low effort to lift maximum load.
- Extra thick asbestos free friction discs.
- Free-wheeling mechanism for quick chain adjustment.
- Drop forged alloy hooks are designed to stretch when overloaded before chain failure and are equipped with integrated heavy duty safety latch.
- Comes with high grade alloy steel load chain.
- Each hoist is proof tested at 1.5 times the rated capacity.
- Complies with EN13157, ASME B30.21, AS1418.2 and SANS 1636.
- Bottom hook with bearing(optional).
- Overload protection(optional).
- Shipyard hook(optional).
- Needle roller bearing between load sprocket and side plates(optional).

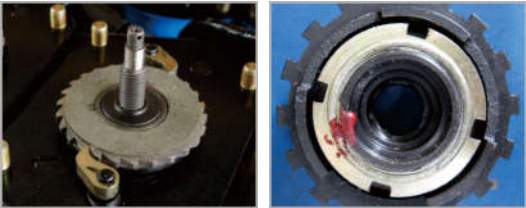

LEVER HOIST

LEVER HOIST LH-A TYPE

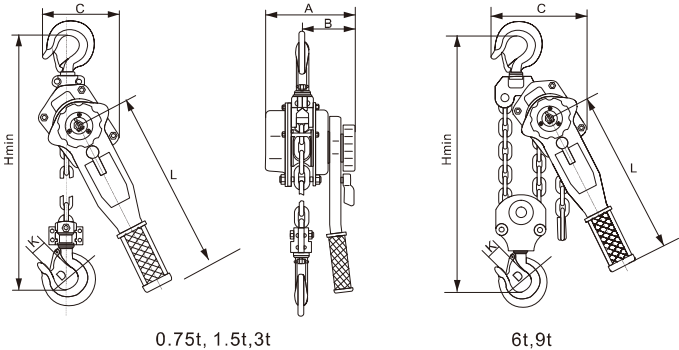

Model	Capacity	Standard Lift	Proof Load	Effort Required to Lift Rated Load	No. of Falls of Load Chain	Load Chain	Dimensions(mm)							N.W.	Extra Weight per Metre	Product Code
	t	m	kN	N		mm	A	B	C	D	Hmin	L	K	kg	kg	
LHA075	0.75	1.5	11.0	140	1	6x18	148	88	135	37	320	290	26	6.3	0.8	120100750
LHA150	1.5	1.5	22.1	240	1	8x24	176	102	162	45	380	420	32.5	11	1.4	120101500
LHA300	3	1.5	44.1	320	1	10x30	195	109	211	50	480	420	37	18.7	2.2	120103000
LHA600	6	1.5	88.2	340	2	10x30	195	109	254	64	620	420	46	30	4.3	120106000
LHA900	9	1.5	132.3	360	3	10x30	195	109	319	85	700	420	50	41.2	6.5	120109000

Remarks:Hoists with the lift in other length are also available.

